




IGWX N22

$U_w = 0,83 \text{ W/m}^2\text{K}^*$

GLAZING


$U_g = 0,5 \text{ W/m}^2\text{K}$

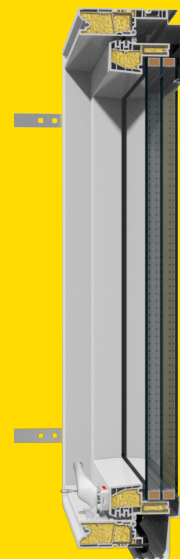

GLAZING

TRIPLE GLAZING

GAS - ARGON
2X WARM SPACER
2X LOW EMISSION COAT
TOUGHENED EXTERNAL PANE




4 GASKETS



HANDLE WITH THE LOCK
AND MICRO-VENTILATION
(2 KEYS IN A SET)



MULTI-CHAMBERED PVC PROFILES
IN WHITE; FRAME FULFILLED WITH
PU FOAM; RESISTANT TO
ATMOSPHERICAL FACTORS



HYDRAULIC CYLINDERS HELP TO
OPEN THE SASH SMOOTHLY
IN 30 DEGREE ANGLE




ROOF PITCH



NON-STANDARD SIZES

After agreeing with the Sales Representative
or Sales Department



WINDOW SIZES

glazing area [m ²]	0,23	0,30
size symbol	01	02
window size: width × height [cm]	55x78	55x98

*Parameter U_w - thermal permeability coefficient.

**Details about the guarantee policy available at www.okpol.com