



FACADE WINDOWS

The products catalog is valid from 05.2020

Window's profile



Energy - saving and high using comfort

- Uw od 0,81 W/m2K

76AD OPTI

KÖMMERLING®

- 76 mm, 2 gaskets
- optimal thermal insulation Uf=1,1 W/m2K
- glazing units 22 – 48 mm
- perfect statics
- attractive design
- effective noise protection
- increased anti-burglary protection RC2
- durability and comfort of use
- possibility of producing structures with dimensions 1000 mm x 2500 mm



The highest insulation parameters

- Uw od 0,79 W/m2K

88MD PREMIUM


KÖMMERLING®

- 88 mm, 3 gaskets
- optimal thermal insulation Uf=0,95 W/m2K
- glazing units 24 – 56 mm
- perfect statics
- attractive design
- effective noise protection
- increased anti-burglary protection RC2
- additional middle gasket
- durability and comfort of use
- possibility of producing structures with dimensions 1000 mm x 2500 mm

Available, standard colours of frames



Available colours of gaskets

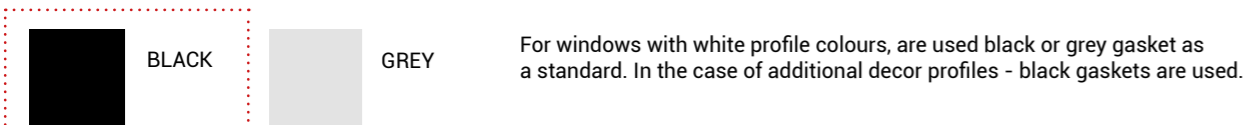

Perfect weld



Glazing units



24 mm (A21)

- structure: 4/16/4
- double glazing
- noble argon gas
- warm spacer
- low-emission coat
- Ug = 1,1 W/m²K



48 mm (A192)

- structure: 4/18/4/18/4
- triple glazing
- noble argon gas
- 2x warm spacer
- 2x low-emission coat
- Ug = 0,5 W/m²K



Different, available glazing units

- various Ug
- various Rw
- safe packages
- toughened panes
- the possibility of custom - made glazing units

Available spacer's colours



Chromatech Ultra
warm spacer in standard option



ActivPilot concept



- Elegant and functional universal hooks with a sign distinctive activPilot fittings.
- The rounded edges of the hinges enables to keep the window clean.
- A lever with a button enables opening the passive sash in windows with a movable pillar. It has also esthetic design.
- An octagonal pin locking system is a functionally perfect mechanism.
- The aesthetic shape of the hinges enables cleaning and maintenance the windows.
- The multifunctional element is a combination of the handle rotation and slip blocks.

Increased anti-burglary class as standard



KÖMMERLING®

Attractive design



10 years warranty on the glazing unit*

Anti-burglary class as standard!

10 years warranty on profiles*



HST PATIO DOORS

PRIME
DOOR

HST terrace doors are characterized by high structural stability, aesthetic design and very high thermal insulation. The doors are made extremely precisely. Full reinforcement along the perimeter of the frame / sash include the creation of large dimensions.



PERMEABILITY OF AIR ACCORDING TO NORM PN-EN 12207
4

WATER RESISTANCE ACCORDING TO NORM PN-EN 12208
9A

WIND LOAD RESISTANCE ACCORDING TO NORM PN-EN 12210
C2



OUTSIDE DOOR

EXTERNO
DOOR

The outside door of our production is characterized by unusual aesthetics of workmanship. Attention to every detail is confirmed by used components of well-known and reputable brands. In addition, the door can be adapted to your own needs by selecting a color, panel or opening method.



We offer a wide range of accessories



G-U fittings dedicated to the system

The highest IV-class tightness of the structure

An additional set of upper trolleys supports the work of the sash

Easy and smooth service

Big sizes!
5000 x 2517 mm

Welds in V-Perfect technology as standard

Threshold: low - standard

open to the outside and inside

Op-class Hahn hinges

Multi-point espagnolette

Large selection of panels

Various closing options: handle, knob, grip

4 colors of fittings to choose from

The low threshold of the renowned Alumaster company



**// Open new perspectives with us
and check our roof windows catalogue**



OKPOL Sp. z o.o.
ul. Topolowa 24
49-318 Skarbimierz-Osiedle
POLAND

Customer service:
phone: 77 404 66 77
fax 77 411 57 34

export@okpol.com
www.okpol.com